

Porta-Matic™ Battery-Powered Portable Pump Specifications and Performance

Keep this innovative portable pump on hand for immediate jobsite dewatering of everything from ditches to manholes. Powered by your truck battery, the Porta-Matic's 1/3 HP motor delivers up to 43 gpm for rapid dewatering and instant priming.


SPECIFICATIONS

PM

	English	Metric
Maximum Flow	43 gpm	163 lpm
Maximum Head Pressure	25'	7.6 m
Fluid Outlet	1.5" NPT or BSPT (female)	
Weight	33 lbs	14.37 kg

PERFORMANCE

PM

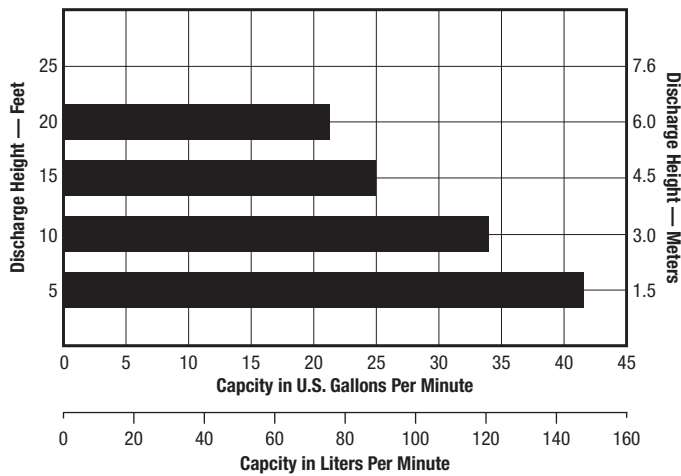

- Runs off any 12-volt truck/auto battery
- Fully submersible
- Fits in openings as small as 10" diameter
- Weighs just 33 lbs.
- 30 foot cord
- Whisper-quiet
- Needs no suction hose, engine cranking or gas cans
- Remote waterproof controller for simple, safe operation
- Low 30-amp draw for an hour (average) of operation without restarting engine
- Available with both 1-1/2" NPT or BSPT (tapered thread) female connections
- Self-lubricating shaft seal, bearing lubricated for life



AP50 Air-Driven High-Pressure Pump Specifications and Performance

When your dewatering application calls for higher head pressures, choose the AP50 dewatering pump. It can pump up to 100 vertical feet while fully submerged. Running off an efficient air motor with auto-start, the AP50 is the perfect tool for dewatering anywhere you can't run electricity.


SPECIFICATIONS

AP50

	English	Metric
Maximum Flow	125 gpm	473 lpm
Maximum Discharge Pressure	48 psi	3.3 bar
Max. Solid Particle Size	.25"	6 mm
Air Inlet	.75" NPT or BSP (male)	
Exhaust Outlet	1.0" NPT or BSP (female)	
Fluid Outlet	2.0" NPT or BSP (female)	
Weight	71 lbs	32 kg

PERFORMANCE

AP50

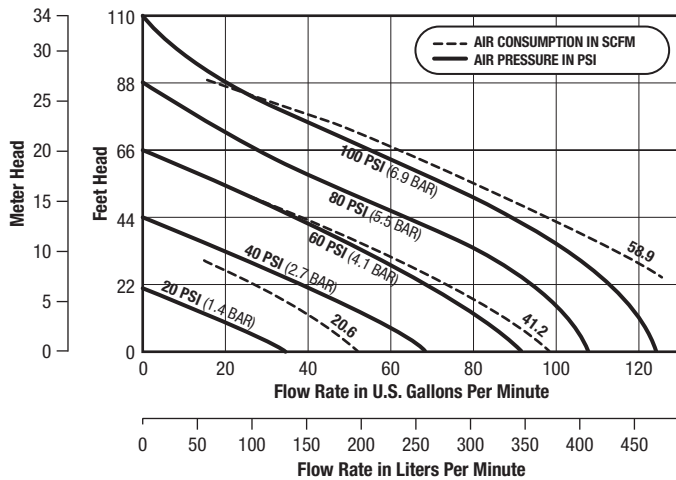

- Fully submersible
- Available in 2"
- Compact and weighs 71 lbs.
- Fits in openings as small as 16" diameter
- Low noise levels
- Long service life
- Easy maintenance
- Convenient carrying handle
- Can run dry without damage
- Sealed construction
- Safe in hazardous areas
- Integral baseplate/strainer
- Open impeller for slurry and solids




SludgeMaster™ Air-Driven High-Flow Pump Specifications and Performance

When your situation calls for fast dewatering, the SludgeMaster delivers. It provides our highest flow rates — up to 300 gpm — and runs on compressed

air for continuous power supply. This trash pump handles everything from mud and leaves to sand and solids without clogging.

PERFORMANCE

SM

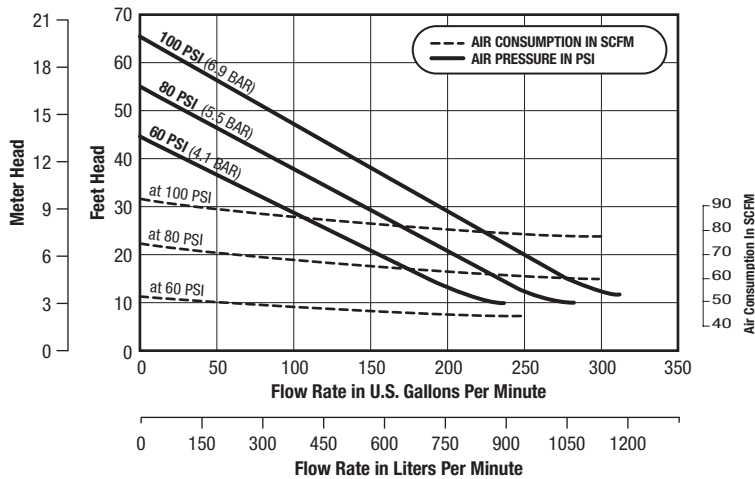

SPECIFICATIONS

SM

	English	Metric
Maximum Flow	300 gpm	1,140 lpm
Maximum Discharge Pressure	28 psi	2 bar
Max. Solid Particle Size	1.5"	6 mm
Air Inlet	.50" NPT	
Exhaust Outlet	.75" NPT	
Fluid Outlet	3" NPT (female)	
Weight	59 lbs	26.76 kg

- Fully submersible
- Weighs 59 lbs
- Won't choke on small trash
- Can run dry without damage
- Handles solids up to 1.5"
- Self-draining to prevent damage in subfreezing weather
- Fits in openings as small as 14" diameter
- Self-priming and continuous automatic lubricating
- Optional rock screen for 1/2" solids available
- Fool-proof design that handles abrasive substances with less wear
- Built for rough handling and long life on land, sea or offshore

